





Start your smart change


SNOUCU[®] QUICK
INSTALLATION MANUAL
REGALGRID.COM/PORTAL

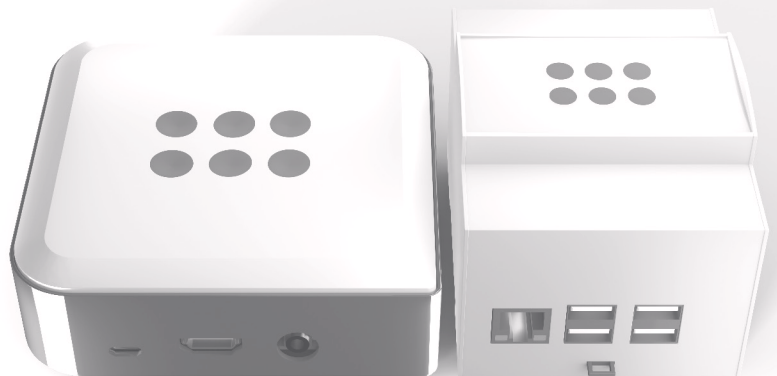

Connect the negative and positive phases of micro-USB cable to the DC side of the power adapter.

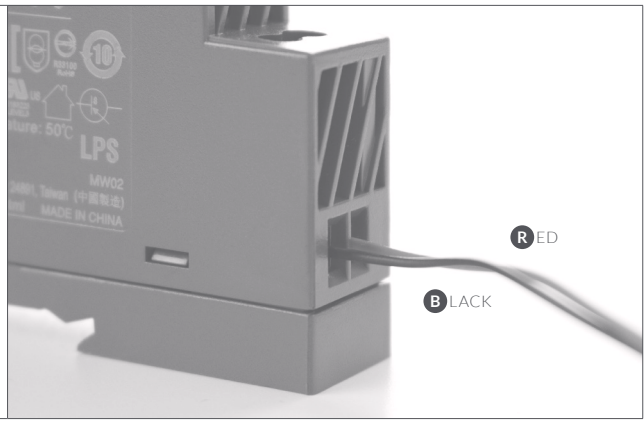

Mount the power adapter on the 35mm DIN bar.

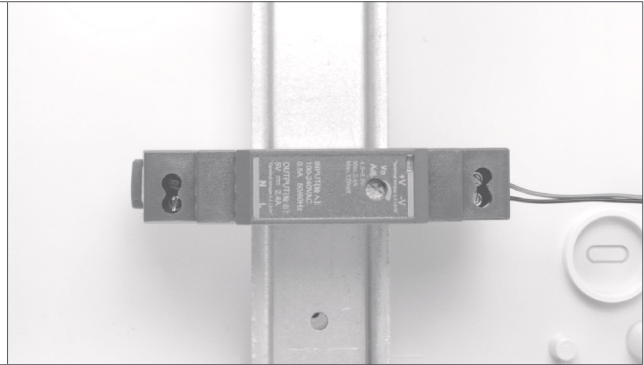


Connect the phase line cable and the ground line cable to the AC side of the power adapter.

Use a dedicated switch for the power adapter to be able to switch on and off the SONCU ON DIN RAIL.

SAFETY: check AC line before connecting any power cable.


SAFETY: check AC power cables connection after tightening the screws.

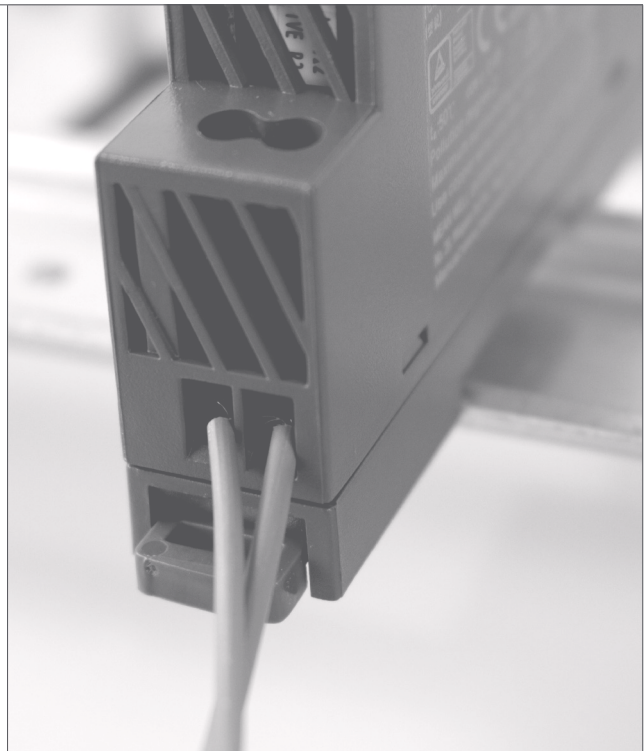

Connect the micro-USB cable of the power adapter to the micro-USB port of the SNOCU DIN Version.



Mount the SNOCU DIN Version on the 35mm DIN bar.

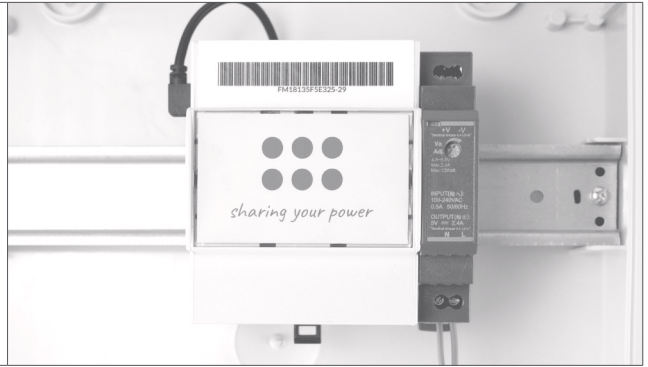

Plug one RJ45 connector of the Ethernet cable into the Ethernet port of the SNOCU DIN Version.




Plug the other RJ45 of the Ethernet cable into the Ethernet port of the Ethernet router or switch with an active network DHCP server and internet communication.



Download and Install Regalgrid® Europe APP from your APP repository or from RegalGrid Europe web site.

Open Regalgrid APP and start the setup process (see Installation Manual for farther details on this procedure).

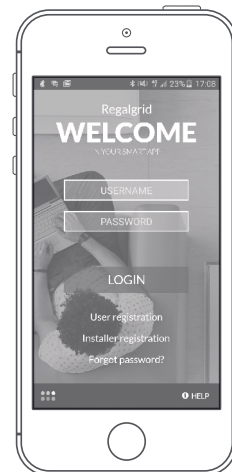

⋮⋮ REGALGRID
sharing your power